

UNO-2.0-I UNO-2.5-I

GENERAL SPECIFICATIONS OUTDOOR MODELS

The UNO-2.0-I and UNO-2.5-I are the latest single phase string inverters in the Aurora range. A new-look inverter but packed with Power-One's proven high performing technology. The new look inverter has new features including a special built-in heat sink compartment and front panel display system.

The smallest of Power-One's outdoor range, these new products are the right size for the average rooftop installation. This rugged outdoor inverter has been designed as a completely sealed unit to withstand the harshest environmental conditions.

The high speed MPPT offers real-time power tracking and improved energy harvesting.


Despite the isolated operation, the UNO-2.0-I and UNO-2.5-I feature an efficiency of 96.3%. The wide input voltage range makes the inverter suitable to low power installations with reduced string size.



Features


- Each inverter is set on specific grid codes which can be selected in the field
- Single phase output
- Wide input range
- High speed and precise MPPT algorithm for real time power tracking and improved energy harvesting
- Flat efficiency curves ensure high efficiency at all output levels ensuring consistent and stable performance across the entire input voltage and output power range
- Outdoor enclosure for unrestricted use under any environmental conditions
- RS-485 communication interface (for connection to laptop or datalogger)
- Compatible with PVI-RADIOMODULE for wireless communication with Aurora PVI-DESKTOP

BLOCK DIAGRAM OF UNO-2.0-I AND UNO-2.5-I

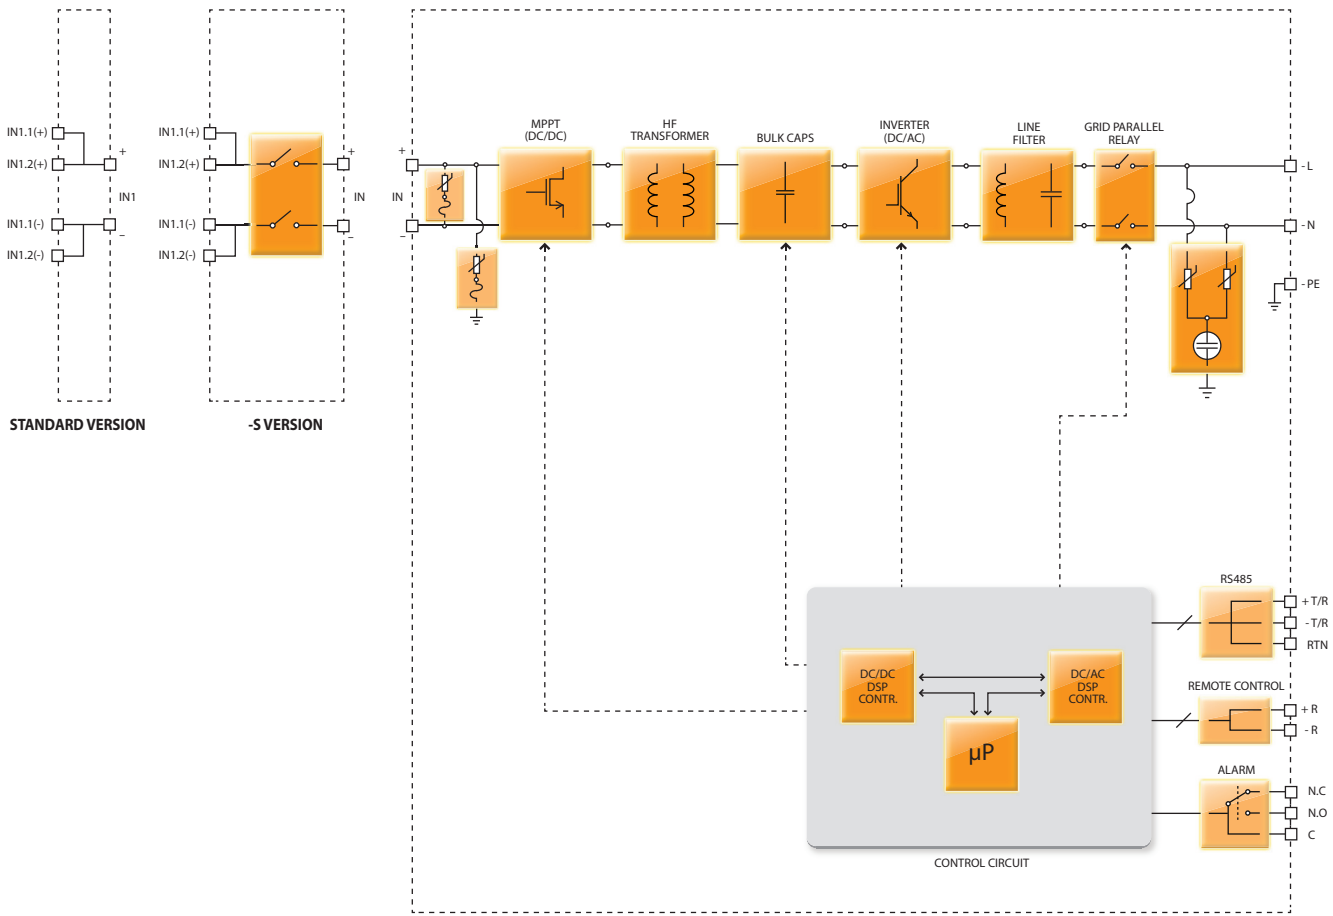


Block Diagram and Efficiency Curves

UNO-2.0-I-OUTD

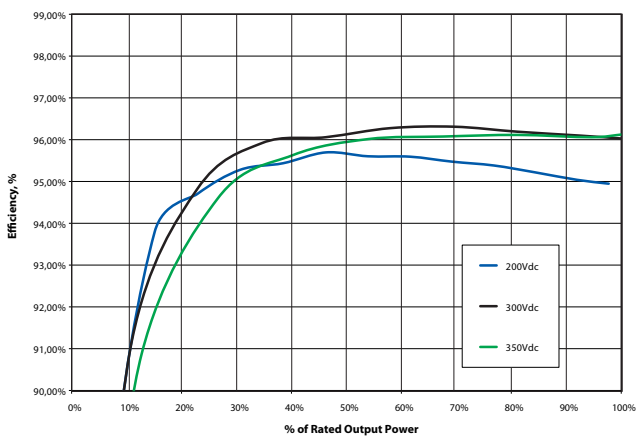

UNO-2.5-I-OUTD

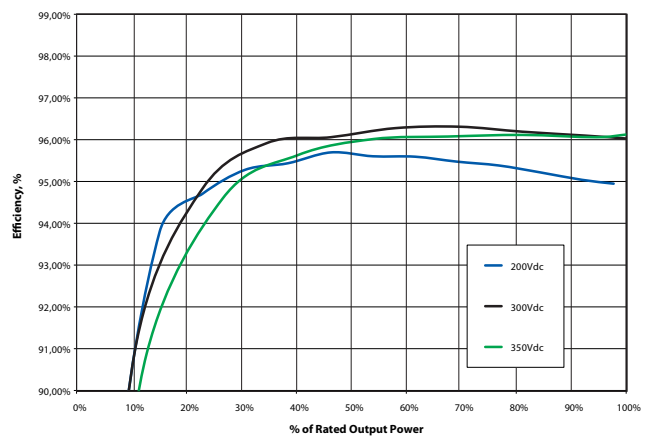

PARAMETER	UNO-2.0-I-OUTD	UNO-2.5-I-OUTD
Input Side		
Absolute Maximum DC Input Voltage ($V_{max,abs}$)	520 V	
Start-up DC Input Voltage (V_{start})	200 V (adj. 120...350 V)	
Operating DC Input Voltage Range ($V_{dcmin} \dots V_{dcmax}$)	$0.7 \times V_{start} \dots 520 V$	
Rated DC Input Power (P_{dcr})	2100 W	2600 W
Number of Independent MPPT	1	
Maximum DC Input Power for each MPPT ($P_{MPPTmax}$)	"2300 W Linear Derating From MAX to Null [470V ≤ VMPPT ≤ 520V]"	"2900 W Linear Derating From MAX to Null [470V ≤ VMPPT ≤ 520V]"
MPPT Input DC Voltage Range ($V_{MPPTmin,f} \dots V_{MPPTmax,f}$) at P_{acr}	200...470 V	205...470 V
DC Power Limitation for each MPPT with Independent Configuration of MPPT at P_{acr} , max unbalance example	Not applicable	
Maximum DC Input Current (I_{dcmax}) / for each MPPT ($I_{MPPTmax}$)	10.0 A / 10.0 A	12.8 A / 12.8 A
Maximum Input Short Circuit Current for each MPPT	15.0 A	
Number of DC Inputs Pairs for each MPPT	2	
DC Connection Type	Tool Free PV Connector WM / MC4	
Input Protection		
Reverse Polarity protection	Yes, from limited current source	
Input Over Voltage Protection for each MPPT - Varistor	2	
Photovoltaic Array Isolation Control	According to local standard	
DC Switch Rating for each MPPT (-S Version)	16 A / 600 V	
Output Side		
AC Grid Connection Type	Single phase	
Rated AC Power (P_{acr})	2000 W	2500 W
Maximum AC Output Power (P_{acmax})	2200 W	2750 W
Rated AC Grid Voltage (V_{acr})	230 V	
AC Voltage Range	180...264 V ⁽¹⁾	
Maximum AC Output Current ($I_{ac,max}$)	10.0 A	12.0 A
Rated Output Frequency (f)	50 Hz	
Output Frequency Range ($f_{min} \dots f_{max}$)	47...53 Hz ⁽²⁾	
Nominal Power Factor (Cosphi _{ac,r})	> 0.995 (adj. ± 0.95)	
Total Current Harmonic Distortion	< 2%	
AC Connection Type	Screw terminal block	
Output Protection		
Anti-Islanding Protection	According to local standard	
Maximum AC Overcurrent Protection	15.0 A	
Output Overvoltage Protection - Varistor	2 (L - N / L - PE)	
Operating Performance		
Maximum Efficiency (η_{max})	96.3%	
Weighted Efficiency (EURO/CEC)	95.0% / -	
Feed In Power Threshold	24.0 W	
Stand-by Consumption	< 8.0 W ⁽³⁾	
Communication		
Wired Local Monitoring	PVI-USB-RS485_232 (opt.), PVI-DESKTOP (opt.)	
Remote Monitoring	PVI-AEC-EVO (opt.), AURORA-UNIVERSAL (opt.)	
Wireless Local Monitoring	PVI-DESKTOP (opt.) with PVI-RADIOMODULE (opt.)	
User Interface	Graphic display	
Environmental		
Ambient Temperature Range	-25...+60°C (-13...+ 140°F) with derating above 45°C (113°F)	
Relative Humidity	0...100 % condensing	
Noise Emission	< 50 db(A) @ 1 m	
Maximum Operating Altitude without Derating	2000 m / 6560 ft	
Physical		
Environmental Protection Rating	IP 65	
Cooling	Natural	
Dimension (H x W x D)	518mm x 367mm x 160mm / 20.4" x 14.4" x 6.3"	
Weight	< 17 kg / 37.4 lb	
Mounting System	Wall bracket	
Safety		
Isolation Level	HF transformer	
Marking	CE	
Safety and EMC Standard	EN 50178, AS/NZS3100, AS/NZS 60950, EN61000-6-1, EN61000-6-3, EN61000-3-11, EN61000-3-12	
Grid Standard	Enel Guideline, VDE 0126-1-1, G83/1, EN 50438, RD1663, AS 4777	
Available Products Variants		
With DC Switch	UNO-2.0-I-OUTD-S	UNO-2.5-I-OUTD-S

1. The AC voltage range may vary depending on specific country grid standard

2. The Frequency range may vary depending on specific country grid standard

3. Night time consumption < 0.6W



www.power-one.com

Power-One Renewable Energy Worldwide Sales Offices

Country	Name/Region	Telephone	Email
Australia	Asia Pacific	+61 2 9735 3111	sales.australia@power-one.com
China	Asia Pacific	+86 755 2988 5888 ext.5588	sales.china@power-one.com
Singapore	Asia Pacific	+65 6896 3363	sales.singapore@power-one.com
France	Europe	00 800 00287672 Choix n°4	sales.france@power-one.com
Germany	Europe	+49 7641 955 2020	sales.germany@power-one.com
Italy	Europe	+39 055 9195 396	sales.italy@power-one.com
Spain	Europe	+34 629253564	sales.spain@power-one.com
United Kingdom	Europe	+44 1903 823 323	sales.UK@power-one.com
Dubai	Middle East	+971 50 100 4142	sales.dubai@power-one.com
Canada	North America	+1 877 261-1374	sales.canada@power-one.com
USA East	North America	+1 877 261-1374	sales.usaeast@power-one.com
USA Central	North America	+1 877 261-1374	sales.usacentral@power-one.com
USA West	North America	+1 877 261-1374	sales.usawest@power-one.com