

ReneSola

156 Series Polycrystalline Solar Module

235W, 240W, 245W, 250W



High Module Conversion Efficiency



Easy Installation and Handling for Various Applications




Withstanding Mechanical Load up to 5400 Pa



Conform with PV Standards: IEC 61215:2005,
IEC 61730:2004, UL 1703



ISO9001, OHSAS18001, ISO14001

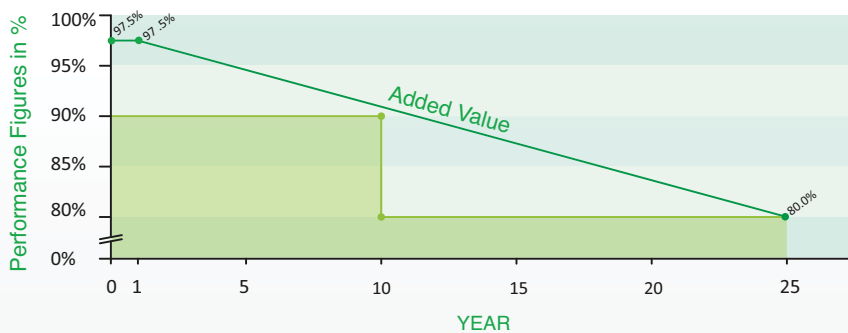

● Linear Performance Warranty

● Traditional Warranty

10-year

material & workmanship

25-year


linear power output



APPROVED PRODUCT




Dimension

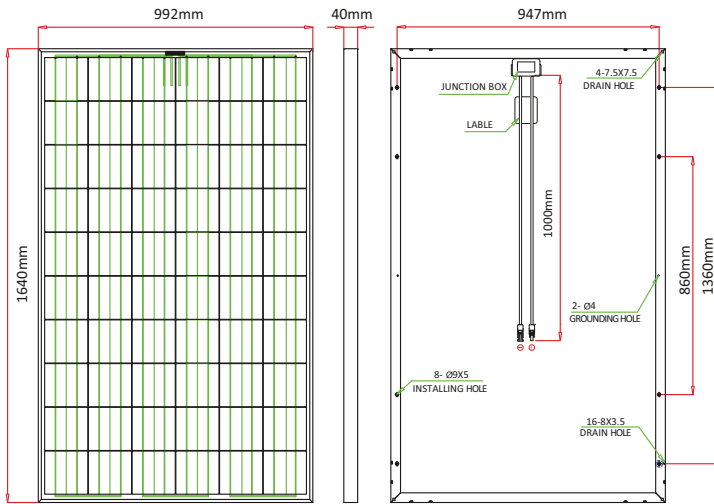

Drawing Only for Reference

I-V Curves

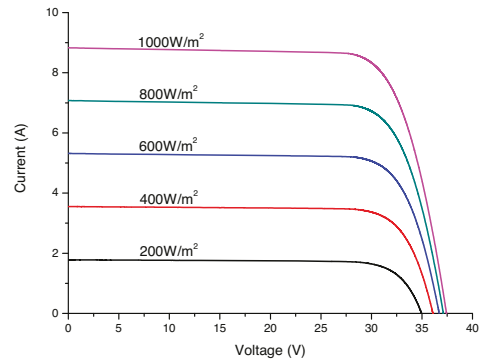

Efficiency at Varied Irradiation

Irradiance	200W/m ²	400W/m ²	600W/m ²	800W/m ²	1000W/m ²
Efficiency	15.1%	15.4%	15.5%	15.5%	15.4%

Electrical Characteristics STC

	JC235M-24/Bb	JC240M-24/Bb	JC245M-24/Bb	JC250M-24/Bb
Maximum Power (Pmax)	235 W	240 W	245 W	250 W
Power Tolerance	0 ~ +5W	0 ~ +5W	0 ~ +5W	0 ~ +5W
Module Efficiency	14.4%	14.8%	15.1%	15.4%
Maximum Power Current (Imp)	8.03 A	8.08 A	8.19 A	8.31 A
Maximum Power Voltage (Vmp)	29.3 V	29.7 V	29.9 V	30.1 V
Short Circuit Current (Isc)	8.58 A	8.64 A	8.73 A	8.83 A
Open Circuit Voltage (Voc)	37.0 V	37.2 V	37.3 V	37.4 V

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics NOCT

	JC235M-24/Bb	JC240M-24/Bb	JC245M-24/Bb	JC250M-24/Bb
Maximum Power (Pmax)	174 W	178 W	182 W	185 W
Maximum Power Current (Imp)	6.42 A	6.51 A	6.53 A	6.57 A
Maximum Power Voltage (Vmp)	27.1 V	27.4 V	27.9 V	28.2 V
Short Circuit Current (Isc)	6.92 A	6.97 A	7.04 A	7.12 A
Open Circuit Voltage (Voc)	34.4 V	34.7 V	35.0 V	35.0 V

Values at Normal Operating Cell Temperature, Irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s

Mechanical Characteristics

Cell Type	156 x156 mm Polycrystalline, 60 (6x10) pcs in series
Glass	High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	IP65/IP67 rated, with bypass diodes
Dimension	*1640 x 992 x 40 mm
Output Cable	4mm ² (EU)/12 AWG(US), 1000mm
Weight	19 Kg
Installation Hole Location	See Drawing Above

Characteristics

Temperature Coefficient of Voc	-0.30%/°C
Temperature Coefficient of Isc	0.04%/°C
Temperature Coefficient of Pmax	-0.40%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

Packing Information

Container	20' GP	40' GP	40' HQ
Pallets per Container	12	28	28
Pieces per Container	300	700	770

Rev No: JC7/DS/2012.07 *Contact Renesola for tolerance specification
CAUTION: All rights reserved. Design and specification are subject to change without prior notice.

Maximum Ratings

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1000VDC (EU) / 600VDC (US)
Maximum Series Fuse Rating	20A (EU) / 15A (US)